
銷售國家

Countries Sold

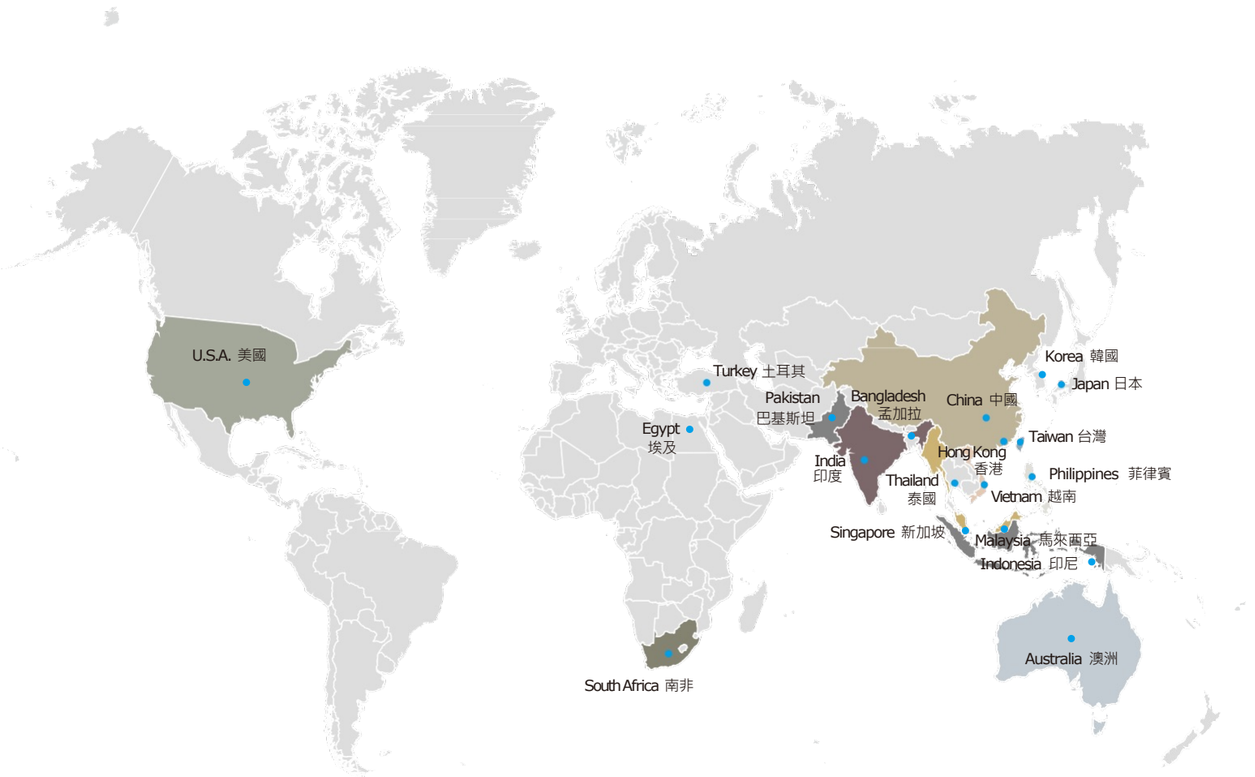

百佑有限公司
LONG BLISS CO., LTD.

436038台中市清水區海濱路172-10號
No. 172-10, Haibin Rd., Qingshui Dist., Taichung City 436038, Taiwan
T +886-4-2626 1765 / 2626 4765 **F** +886-4-2626 6925
E longblis@ms45.hinet.net
www.longbliss.com.tw

2025 0110

百佑機械
LONG BLISS CO., LTD.

再生棉機械

Fiber Recycled Machinery







廢棄物回收機械設備的領導者

LONG BLISS CO., LTD. 成立於 1973 年。專門從事紡織廠和布廠各種廢料的回收和處理。本公司利用回收製程，製造輸出整廠機械設備，適用於抽紗、填充、不織布等多種用途。

我們的客戶群遍佈全球，包括美國、中國、澳洲、南非、韓國、印度、巴基斯坦、孟加拉、馬來西亞、印尼、泰國、菲律賓、越南和埃及等主要市場，致力於持續提供卓越服務。
我們的設計是根據客戶的特定需求而客製化的。我們也協助客戶處理不同原料的加工技術，體現我們對客戶滿意度、卓越品質和無可挑剔服務的承諾。

歷史悠久，經驗豐富，品質有保證，LONG BLISS生產的廢品回收機器是業界的最佳選擇。我們堅定不移地致力於創新、品質和客戶滿意度，鞏固了我們作為全球企業值得信賴和可靠的合作夥伴的聲譽。

A Leader in Waste Recycling Machinery and Equipment

Founded in 1973, LONG BLISS CO., LTD. specialized in the recycling and treatment of various waste materials from spinning and cloth mills. Our company utilizes the recycling process to manufacture and output whole plant machinery and equipment, serving multiple purposes such as drawnwork, filling, and non-woven fabrics.

With a customer base that spans the globe, including key markets such as the United States, China, Australia, South Africa, South Korea, India, Pakistan, Bangladesh, Malaysia, Indonesia, Thailand, the Philippines, Vietnam, and Egypt, we are committed to delivering excellence consistently.
Our designs are tailored to meet the specific needs of our customers. We also assist our customers with processing technology for different raw materials, embodying our commitment to customer satisfaction, quality excellence, and impeccable service.

With a long history, rich experience, and guaranteed quality, the waste recycling machines produced by LONG BLISS stand as the industry's best choice. Our unwavering commitment to innovation, quality, and customer satisfaction has solidified our reputation as a trusted and reliable partner for businesses worldwide.


Reduce
Reuse
Recycle



Processing Scraps & Recycling Old Clothes

紡織廠下腳料，舊衣回收皆能處理

Recycling in textile factories that processing fabric scraps and used clothing.



Fiber Opening

此階段將布料運用物理解纖之方式轉化為可再利用材料。


Utilizes physical and chemical methods to convert fabric into reusable materials.



Spinning

紡紗廠做配色及紡紗

Color matching and spinning are outsourced to other factories according to customer requirements.



Weaving

織造

Weaving yarn into a variety of fabrics with different textures, thicknesses and patterns.



New Product

產品利用廣泛：家飾織物、鞋材、衣材、不織布及填充等

Acquiring a rejuvenated recycled product.

LB-107 平刀切斷機

FLAT BLADE TYPE CUTTING MACHINE

Function

專切各種合成麻、棉紗線、TRC紗線、布邊紗、碎布、尼龍絲、特多龍絲、紙類、碳纖紗線、玻璃纖維紗線等。

Designed for cutting various synthetic hemps, cotton yarn, TRC yarn, selvedge yarn, cloth fragments, nylon yarn, PET yarn, paper, carbon fiber yarn, and glass fiber yarn.


- 無段變速調整纖維長度。
- 調刀迅速，高產能。
- 設有安全裝置以保護作業員的人身安全。
- Variable speed adjustment for fiber length.
- Quick to adjust blade. High productivity.
- Equipped with a safety device that provides a protection for the operator.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-107
產能	Capacity	800~1000kg/hr
切斷長度	Length of cut	10~100mm
迴轉速	Running speed	200 R.P.M
馬力	Motor horsepower	13.25kw
重量	Weight	2000kg
體積	Machine dimensions	4400 x 1500 x 1600mm



刀架示意圖
Illustrated diagram of blade holder

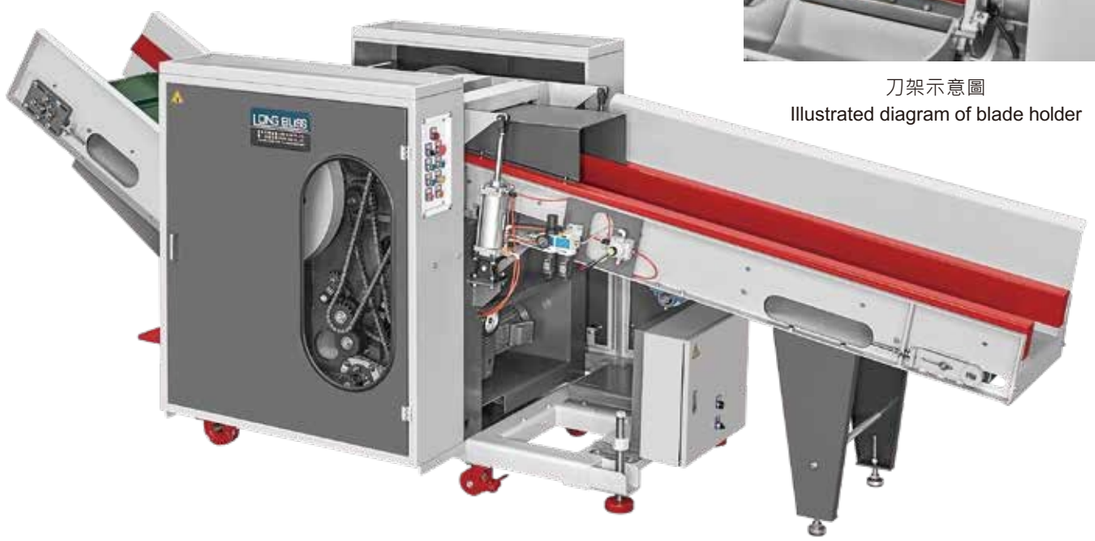

LB-108 平刀切斷機

FLAT BLADE TYPE CUTTING MACHINE

Function

專切各種合成麻、棉紗線、TRC紗線、布邊紗、碎布、尼龍絲、特多龍絲、紙類、碳纖紗線、玻璃纖維紗線等。

Designed for cutting various synthetic hemps, cotton yarn, TRC yarn, selvedge yarn, cloth fragments, nylon yarn, PET yarn, paper, carbon fiber yarn, and glass fiber yarn.

- 無段變速調整纖維長度。
- 調刀迅速，高產能。
- 設有安全裝置以保護作業員的人身安全。
- Variable speed adjustment for fiber length.
- Quick to adjust blade. High productivity.
- Equipped with a safety device that provides a protection for the operator.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-108	LB-105
產能	Capacity	500~700kg/hr	150~300kg/hr
切斷長度	Length of cut	10~100mm	10~100mm
迴轉速	Running speed	200 R.P.M	200 R.P.M
馬力	Motor horsepower	8.62kw	6.62kw
重量	Weight	1800kg	1200kg
體積	Machine dimensions	3500 x 1500 x 1300mm	2460 x 1060 x 1080mm



LB-203 喂棉機

FIBER FEEDING MACHINE

Function

用於各種合成麻、棉紗線、TRC紗線、布邊紗、碎布、尼龍絲、特多龍絲等之送料。

Applicable for feeding various synthetic hemps, cotton yarn, TRC yarn, selvedge yarn, cloth fragments, nylon yarn and PET yarn.

- 具備自動送料、混合、暫存之功能。
- 可節省大量人力。
- 設有平簾與針簾，使入、出料平緩順暢。
- 具備變頻器，可調速用。

- Combine various functions in one, such as automatic feed, mixing and temporary storage.
- Help to save manpower for transportation.
- Designed with flat curtain and needle curtain, allowing material infeed/outfeed to be smoother.
- A frequency inverter is equipped for adjusting speed.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-203	LB-203-80
產能	Capacity	300~500kg/hr	150~300kg/hr
切斷長度	Length of cut	1000mm	800mm
迴轉速	Running speed	15~25 R.P.M/Min	15~25 R.P.M/Min
馬力	Motor horsepower	3kw	1.5kw
重量	Weight	1200kg	1000kg
體積	Machine dimensions	4700 x 1450 x 2050mm	4700 x 1250 x 2050mm



LB-206 泡棉機

FOAM MACHINE

Function

- 裁邊泡棉專用機。(可聚合)
- 複合材料泡棉(床墊裁邊)只能做填充用，不能再聚合。
- A foam machine with edge cutting (polymerizable).
- The composite material of foam (edge-cut mattress) is used only for stuffing, but polymerization can't be performed.

- 具備濾網，可依客戶需求設計孔洞大小。
- 配合懸吊式控制面板。
- 具備變頻器，可調速用。

- The hole size of the filter can be custom-made to meet customer requirements.
- Equipped with a pendant control panel.
- A frequency inverter is equipped for adjusting speed.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-206	LB-206-75
產能	Capacity	300~500kg/hr	200~300kg/hr
工作寬度	Working width	1020mm	760mm
迴轉速	Running speed	900~1100 R.P.M	900~1100 R.P.M
馬力	Motor horsepower	42.2kw	24.95kw
重量	Weight	2000kg	1700kg
體積	Machine dimensions	5200 x 2390 x 1520mm	3930 x 1570 x 1370mm
主輪錫林	Cylinder of main roller	Ø620 x 1020mm	Ø500 x 760mm



LB-208 開纖機

FIBER OPENER MACHINE

Function

用於第一道開棉，包括斬刀、破籽棉等各種紗線(如：麻、棉紗線、TRC紗線、布邊紗、碎布、尼龍絲、特多龍絲等。

This machine is used for first opening of cotton, including various yarns of flat strips and broken seed cotton (such as hemps, cotton yarn, TRC yarn, selvedge yarn, cloth fragments, nylon yarn and PET yarn).

- 以特殊針布鬆開纖維，在製程中鬆開糾結處並用除塵刀去除雜質，避免後續製程傷害纖維、針布損壞。
- 具備變頻器，可調速用。
- 針布可單支更換。

- Using special card clothing to open fibers. The process untangles knots and removes impurities with a dust-removal blade, preventing damage to the fibers and the card clothing in subsequent processing steps.
- A frequency inverter is equipped for adjusting speed.
- Replacing a single unit of card clothing is allowed.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-208	LB-208-75
產能	Capacity	500~800kg/hr	300~500kg/hr
工作寬度	Working width	1020mm	760mm
迴轉速	Running speed	900~1100 R.P.M	900~1100 R.P.M
馬力	Motor horsepower	25.2kw	18.7kw
重量	Weight	2000kg	1700kg
體積	Machine dimensions	4100 x 1850 x 1510mm	4000 x 1570 x 1370mm
主輪錫林	Cylinder of main roller	Ø620 x 1020mm	Ø500 x 760mm



LB-209 碎紙機

PAPER SHREDDER

Function

- 碎紙。
- 床墊邊料(布+不織布+泡棉)。

- For shredding paper.
- Edge scrap of mattress (cloth + non-woven cloth + foam)

- 具備濾網，可依客戶需求設計孔洞大小。
- 具備變頻器，可調速用。
- 配有懸吊式控制面板。
- 針布可單支更換。

- Equipped with a filter, the hole size can be designed according to customer requirements.
- A frequency inverter is equipped for adjusting speed.
- Equipped with a pendant control panel.
- Replacing a single unit of card clothing is allowed.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-209	LB-209-75
產能	Capacity	300~500kg/hr	150~300kg/hr
工作寬度	Working width	1020mm	760mm
迴轉速	Running speed	1200~1400 R.P.M	1200~1400 R.P.M
馬力	Motor horsepower	42.2kw	24.95kw
重量	Weight	2000kg	1700kg
體積	Machine dimensions	4100 x 1850 x 1510mm	2000 x 1570 x 1370mm
主輪錫林	Cylinder of main roller	Ø620 x 1020mm	Ø500 x 760mm



LB-407 紡棉機

FIBER COMBING MACHINE

Function

用於第2道至第8道開棉各種紗線(如：麻、棉紗線、TRC紗線、布邊紗、碎布、尼龍絲、特多龍絲等。

Suitable for opening various yarns from the second step to the 8th step of the process. (such as hemps, cotton yarn, TRC yarn, selvedge yarn, cloth fragments, nylon yarn and PET yarn).

- 採用特殊針布，不損纖維，不起毛球，在製程中鬆開糾結處並用除塵刀去除雜質，避免後續製程傷害纖維、針布損壞。
- 具備變頻器，可調速用。
- 依客戶開纖需求使用不同針布(針布尺寸：2.16, 1.65, 1.1)。


- Using special card clothing fabric, it does not damage the fibers or cause pilling. During the process, entangled areas are loosened and impurities are removed with a cleaning knife, avoiding fiber damage and card cloth wear in subsequent processes.
- Equipped with a frequency converter, the speed can be adjusted.
- Different card cloths are used according to the customer's opening requirements (card cloth sizes: 2.16, 1.65, 1.1).

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-407	LB-408	LB-408-75
產能	Capacity	300~500kg/hr	250~400kg/hr	150~300kg/hr
工作寬度	Working width	960mm	960mm	760mm
迴轉速	Running speed	900~1100 R.P.M	900~1100 R.P.M	900~1100 R.P.M
馬力	Motor horsepower	22.95kw	19.45kw	14kw
體積	Machine dimensions	2260 x 1720 x 4390mm	2260 x 1720 x 4290mm	2260 x 1500 x 4290mm
主輪錫林	Cylinder of main roller	Ø650 x 960mm	Ø550 x 960mm	Ø550 x 760mm





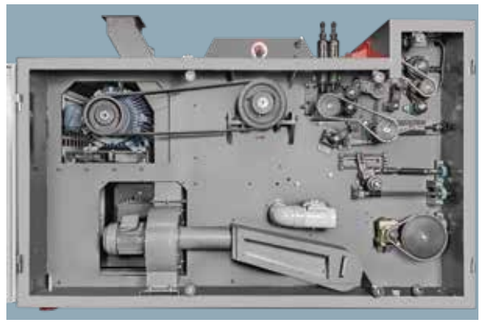


LB-601 七連式清花機

SEVEN SECTIONS FIBERS BLOWING MACHINE BLOW ROOM & CARD FDP WASTE

Function


- 本機用於回收朴子、斬刀等下腳棉。
- 具備螺旋打手，螺旋桿可分離廢料，專為O.E.氣流紡回收原料使用。
- This machine is suitable for recycling various waste cottons, such as blowing waste and cutting waste.
- Designed with spiral beater and spiral rod for separating wastes. This machine is designed specifically for material recycling in O.E. spinning mill.

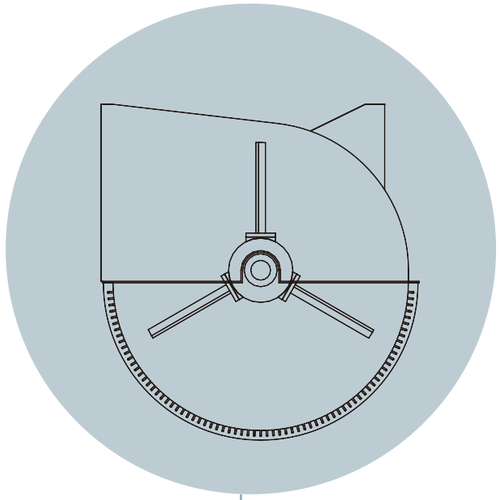

內部螺旋打手示意圖

Diagram of Internal Spiral Beaters

- 備有變頻器，可調整轉速。
- 經篩網過濾棉殼粉塵。
- 兩側設有吸風口可將粉塵集中蒐集。
- A frequency inverter is equipped for adjusting running speed.
- Cotton shell dusts are filtrated through screen.
- Air ports are provided at both sides of the machine for collecting powder dusts.

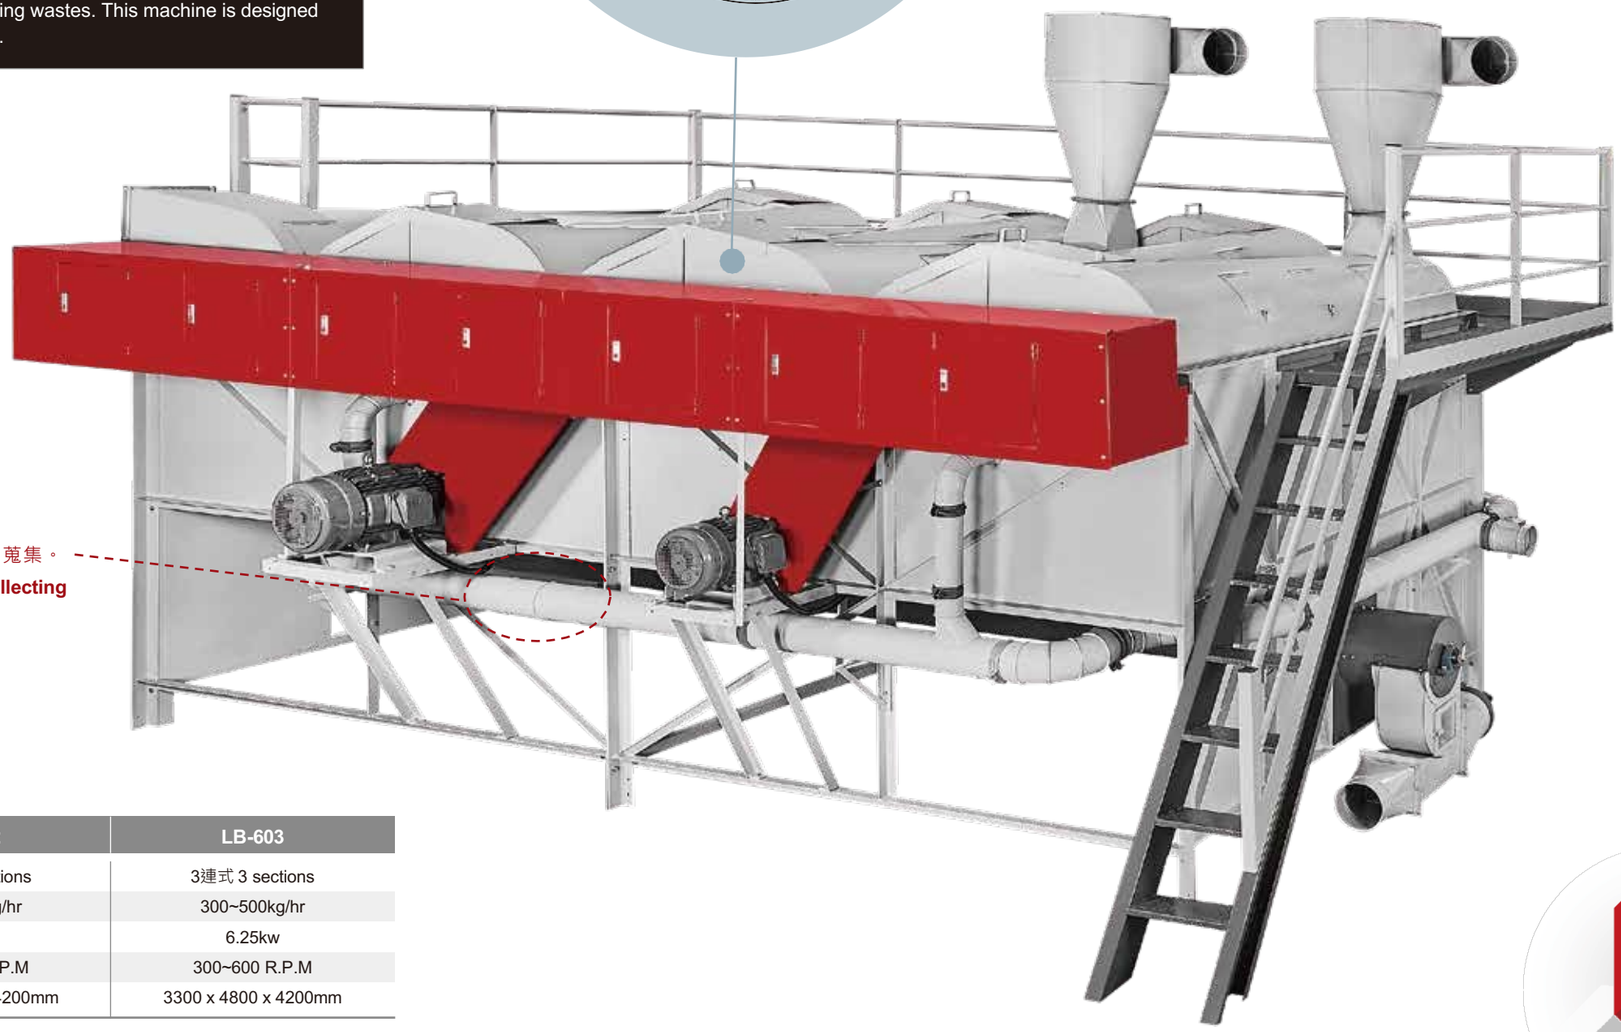

兩側設有吸風口可將粉塵集中蒐集。

Air ports at both sides for collecting powder dusts.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-601	LB-602	LB-603
設備規格	Machine type	7連式 7 sections	5連式 5 sections	3連式 3 sections
產 能	Capacity	400~800kg/hr	400~600kg/hr	300~500kg/hr
馬 力	Motor horsepower	11.95kw	8.25kw	6.25kw
迴轉速	Running speed	300~600 R.P.M	300~600 R.P.M	300~600 R.P.M
體 積	Machine dimensions	6200 x 4800 x 4200mm	4800 x 4800 x 4200mm	3300 x 4800 x 4200mm

LB-502A-10 打包機

BALING MACHINE

Function

將已開纖之各種纖維透過操作員手動送入投料口至棉箱，自動壓縮成塊，操作員只需手動打包。

The operator manually feed various fibers into the cotton box via the material inlet port, which are then compressed automatically into blocks. The operator only needs to perform baling operation.

- 使用年限長、零件不易毀損、維護簡易。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 佔地面積小。
- Long service life, parts are not damaged easily, and easy to maintain.
- Equipped with a safety device, which can detect if the operator enters the dangerous area or not during operation.
- Small footprint.



安全裝置
(傳感器)
Safety Device
(transducer)

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502A-10
產能	Capacity	400kg/hr
馬力	Motor horsepower	7.5kw
最大出力	Maximum force output	35 ton
體積	Machine dimensions	2440 x 2400 x 4165mm
油壓缸活塞	Piston of hydraulic cylinder	Ø150 x 1425mm
棉包尺寸	Sizes of cotton bale	520 x 760 x 1350mm
棉包重量	Weight of cotton bale	100~150kg

LB-502A-15 打包機

BALING MACHINE

Function

將已開纖之各種纖維透過操作員手動送入投料口至棉箱，自動壓縮成塊，操作員只需手動打包。

The operator manually feed various fibers into the cotton box via the material inlet port, which are then compressed automatically into blocks. The operator only needs to perform baling operation.

- 使用年限長、零件不易毀損、維護簡易。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 佔地面積小。
- Long service life, parts are not damaged easily, and easy to maintain.
- Equipped with a safety device, which can detect if the operator enters the dangerous area or not during operation.
- Small footprint.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502A-15
產能	Capacity	400kg/hr
馬力	Motor horsepower	11kw
最大出力	Maximum force output	35 ton
體積	Machine dimensions	2480 x 2400 x 4165mm
油壓缸活塞	Piston of hydraulic cylinder	Ø150 x 1425mm
棉包尺寸	Sizes of cotton bale	520 x 760 x 600mm
棉包重量	Weight of cotton bale	150~180kg



安全裝置
(傳感器)
Safety Device
(transducer)

LB-502A 打包機

BALING MACHINE

Function

將已開纖之各種纖維透過操作員手動送入投料口至棉箱，自動壓縮成塊，操作員只需手動打包。

The operator manually feed various fibers into the cotton box via the material inlet port, which are then compressed automatically into blocks. The operator only needs to perform baling operation.

- 使用年限長、零件不易毀損、維護簡易。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 設有平台架(尺寸客製化)，供操作員篩選原料，加快作業速度。
- 佔地面積小。

- Long service life, parts are not easily damaged, and easy to maintain.
- Equipped with a safety device, which can detect if the operator enters the dangerous area or not during operation.
- Equipped with a standing platform (sizes are customized), allowing the operator to select material for increasing production speed.
- Small footprint.



設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502A-20	LB-502A-25	LB-502A-30
產能	Capacity	600kg/hr	800kg/hr	1000kg/hr
馬力	Motor horsepower	15kw	18.5kw	22kw
最大出力	Maximum force output	63 ton	80 ton	98 ton
體積	Machine dimensions	2650 x 2500 x 6400mm	2650 x 2500 x 6400mm	3260 x 850 x 6770mm
油壓缸活塞	Piston of hydraulic cylinder	Ø200 x 2500mm	Ø225 x 2500mm	Ø250 x 2500mm
棉包尺寸	Sizes of cotton bale	1100 x 630 x 1000mm	1100 x 630 x 1000mm	1100 x 630 x 1000mm
棉包重量	Weight of cotton bale	180~220kg	220~250kg	250~300kg

LB-502B 雙桶打包機

DOUBLE CHAMBER FIBER BALING MACHINE

Function

- 內有自動裝置，操作員只需打包。
- 具備暫存棉箱與集塵器，3.7&5.5kw物料風車可自動傳送。
- 具備自動三通，雙桶可交替使用，打包不影響產能。

- Equipped with automatic devices, so that the operator only needs to perform manual baling operation.
- With the use of temporary storage cotton box and dust collector, the material air blower driven by 3.7kw and 5.5kw motors provides automatic delivery.
- Equipped with automatic three-way, double chambers can be used alternatively without affecting throughput due to baling.

- 使用年限長、零件不易毀損、維護簡易。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 可依廠房高度設計機器高度，最低需求8M。

- Long service life, parts are not easily damaged, and easy to maintain.
- Equipped with a safety device, which can detect if the operator enters the dangerous area or not during operation.
- Machine height can be designed to suit customer's factory space. Minimum height required is 8M.



設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502B-20	LB-502B-25	LB-502B-30
產能	Capacity	400kg/hr	450kg/hr	500kg/hr
馬力	Motor horsepower	16.48kw	19.98kw	23.48kw
最大出力	Maximum force output	63 ton	80 ton	98 ton
體積	Machine dimensions	3400 x 3240 x 7500mm	3500 x 3240 x 7500mm	3500 x 3240 x 7600mm
油壓缸活塞	Piston of hydraulic cylinder	Ø200 x 2500mm	Ø225 x 2500mm	Ø250 x 2500mm
棉包尺寸	Sizes of cotton bale	1130 x 630 x 1000mm	1130 x 630 x 1000mm	1130 x 630 x 1000mm
棉包重量	Weight of cotton bale	180~200kg	210~230kg	230~250kg

LB-502C 打包機

BALING MACHINE

Function

- 內有自動裝置，操作員只需打包。
- 具備暫存棉箱與集塵器，3.7&5.5kw物料風車可自動傳送。
- Equipped with automatic devices, so that the operator only needs to perform manual baling operation.
- With the use of temporary storage cotton box and dust collector, the material air blower driven by 3.7kw and 5.5kw motors provides automatic delivery.

- 加裝儲存棉箱使產能可達500kg/hr。
- 使用年限長，零件不易毀損，維護簡易。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 可依廠房配置設計機器高度，最低需求8M。
- By installing an additional storing cotton box, throughput can reach 500kg/hr.
- Long service life, parts are not easily damaged, and easy to maintain.
- Equipped with a safety device, which can detect if the operator enters the dangerous area or not during operation.
- Machine height can be designed to suit customer's factory space. Minimum height required is 8M.



設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502C-20	LB-502C-25	LB-502C-30
產能	Capacity	200~400kg/hr	250~450kg/hr	300~500kg/hr
馬力	Motor horsepower	15.74kw	19.24kw	22.74kw
最大出力	Maximum force output	63 ton	80 ton	98 ton
體積	Machine dimensions	3160 x 2500 x 7500mm	3260 x 2650 x 7500mm	3260 x 2650 x 7600mm
油壓缸活塞	Piston of hydraulic cylinder	Ø200 x 2500mm	Ø225 x 2500mm	Ø250 x 2500mm
棉包尺寸	Sizes of cotton bale	1130 x 630 x 1000mm	1130 x 630 x 1000mm	1130 x 630 x 1000mm
棉包重量	Weight of cotton bale	180~200kg	210~230kg	230~250kg

LB-502D 打包機(含擋棉設備)

BALING MACHINE (Incl. Cotton Blocking Equipment)

Function

- 內有自動裝置，操作員只需打包。
- 具備暫存棉箱與集塵器，3.7&5.5kw物料風車可自動傳送。
- 加裝擋棉設備(防止原料膨脹)。
- Equipped with automatic devices, so that the operator only needs to perform manual baling operation.
- With the use of temporary storage cotton box and dust collector, the material air blower driven by 3.7kw and 5.5kw motors provides automatic delivery.
- Equipped with the cotton blocking equipment to prevent material from expanding.

- 加裝儲存棉箱使產能可達800kg/hr。
- 使用年限長，零件不易毀損，維護簡易。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 可依廠房配置設計機器高度，最低需求8M。
- By installing an additional storing cotton box, throughput can reach 800kg/hr.
- Long service life, parts are not easily damaged, and easy to maintain.
- Equipped with a safety device, which can detect if the operator enters the dangerous area or not during operation.
- Machine height can be designed to suit customer's factory space. Minimum height required is 8M.



設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502D-20	LB-502D-25	LB-502D-30
產能	Capacity	400~600kg/hr	500~700kg/hr	600~800kg/hr
馬力	Motor horsepower	15.74kw	19.74kw	23.5kw
最大出力	Maximum force output	63 ton	80 ton	98 ton
體積	Machine dimensions	3160 x 2500 x 7500mm	3260 x 2650 x 7500mm	3260 x 2650 x 7600mm
油壓缸活塞	Piston of hydraulic cylinder	Ø200 x 2500mm	Ø225 x 2500mm	Ø250 x 2500mm
棉包尺寸	Sizes of cotton bale	1130 x 630 x 1000mm	1130 x 630 x 1000mm	1130 x 630 x 1000mm
棉包重量	Weight of cotton bale	180~200kg	210~230kg	230~250kg

LB-502F 羽絨專用打包機


DOWN BALING MACHINE

Function


- 加裝擋棉設備(防止原料膨脹)。
- 備有手動油壓門片。
- Equipped with the cotton blocking equipment to prevent material from expanding.
- Designed with manual controlled hydraulic door open/close.

- 使用年限長，零件不易毀損，維護簡易。
- 佔地面積小。
- 設有安全裝置(偵測運作過程中有無作業員進入危險範圍)。
- 羽絨包尺寸可客製化。

- Long service life, parts are not easily damaged, and easy to maintain.
- Small footprint.
- Equipped with a safety device, witch can detect if the operator enters the dangerous area or not during operation.
- Sizes of down bale can be custom-designed.

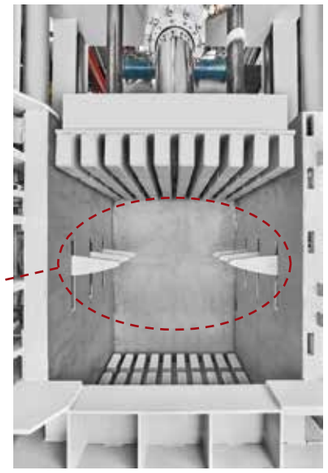

■ 加裝擋棉設備
Equipped with cotton blocking equipment

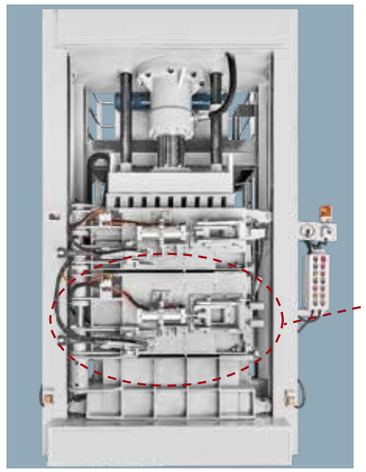

■ 設計油壓式開關門，節省人力
Hydraulic door open/close for saving manpower.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-502F-30
產能	Capacity	400~600kg/hr
馬力	Motor horsepower	22kw
最大出力	Maximum force output	140 ton
體積	Machine dimensions	2100 x 3600 x 5500mm
油壓缸活塞	Piston of hydraulic cylinder	Ø300 x 1600mm
棉包尺寸	Sizes of cotton bale	1090 x 750 x 1000mm
棉包重量	Weight of cotton bale	200kg



安全裝置 (傳感器) **Safety Device (transducer)**

LB-899 填充機

STUFFING MACHINE

Function

- 專用於填充枕頭、洋娃娃、各式坐墊。
- 操作簡單，省時省力，效率高。
- This machine is applicable for stuffing pillows, dolls and various seat cushions.
- Easy to operate, time and effort saving and high efficiency.



- 出料管有多種尺寸可供更換使用(Ø19, 25, 32, 38, 43, 48mm)。
- 使用腳踩踏板填充。
- 備有變頻器，可調整轉速。
- The outfeed pipe provides various sizes to select (Ø19, 25, 32, 38, 43, 48mm).
- Stuffing is operated by using a foot pedal.
- A frequency inverter is equipped for adjusting running speed.

設備參數 **Machine Specifications:**

設備型號 MODEL		LB-899
馬力	Motor horsepower	1.5kw
重量	Weight	150 kg
體積	Machine dimensions	1100 x 800 x 3850mm

RB 回收棉箱

RECYCLE BIN

Function

暫存、收集功能。

Temporary storage and collection functions

- 收集纖維、棉殼。
- 附有上下光電控制羅拉轉動，以為塞棉。
- 備有變頻器，可調整轉速。
- For collecting fiber and cotton shell.
- The upper and lower photoelectric sensors control roller rotation, that may avoid cotton blockage.
- A frequency inverter is equipped for adjusting running speed.



設備參數 **Machine Specifications:**

設備型號 MODEL		RB
工作寬度	Working weight	250 x 900mm
馬力	Motor horsepower	0.37kw
體積	Machine dimensions	1300 x 1450 x 5200mm

SB 儲存棉箱

STORAGE BOX

Function

暫存處理好之原料，等待後續處理(送至打包機或再次加工)。

For temporary storage of well processed materials and waiting for the next treatment (Delivering to a baling machine or conducting subsequent machining).

- 儲存及開鬆原料。
- 附有上下光電控制羅拉轉動，以防塞棉。
- 備有變頻器，可調整轉速。
- For storing and loosening materials.
- The upper and lower photoelectric sensors control roller rotation, that may avoid cotton blockage.
- A frequency inverter is equipped for adjusting running speed.



設備參數 **Machine Specifications:**

設備型號 MODEL		SB
儲存量	Storage capacity	120 kg
工作寬度	Working weight	800 x 1100mm
馬力	Motor horsepower	2.25kw
體積	Machine dimensions	3100 x 2600 x 7000mm

其他配件

OTHER ACCESSORIES



手動三通
MANUAL DIVISION



3.7kw風車
FAN BLOWER



單門自動三通
AUTO DIVISION



5.5kw風車
FAN BLOWER



雙門自動三通
AUTO DIVISION



S型磁鐵
S-MAGENT